


# 6' DUAL-LEG INTERNAL SHOCK-ABSORBING WELDER'S LANYARD



## Part Number: FAP30299(WL)-SK

Our **Dingo Core™** series of single and dual-leg lanyards provide an economical solution for Non-SRL applications and are available in multiple hook and shock pack configurations.

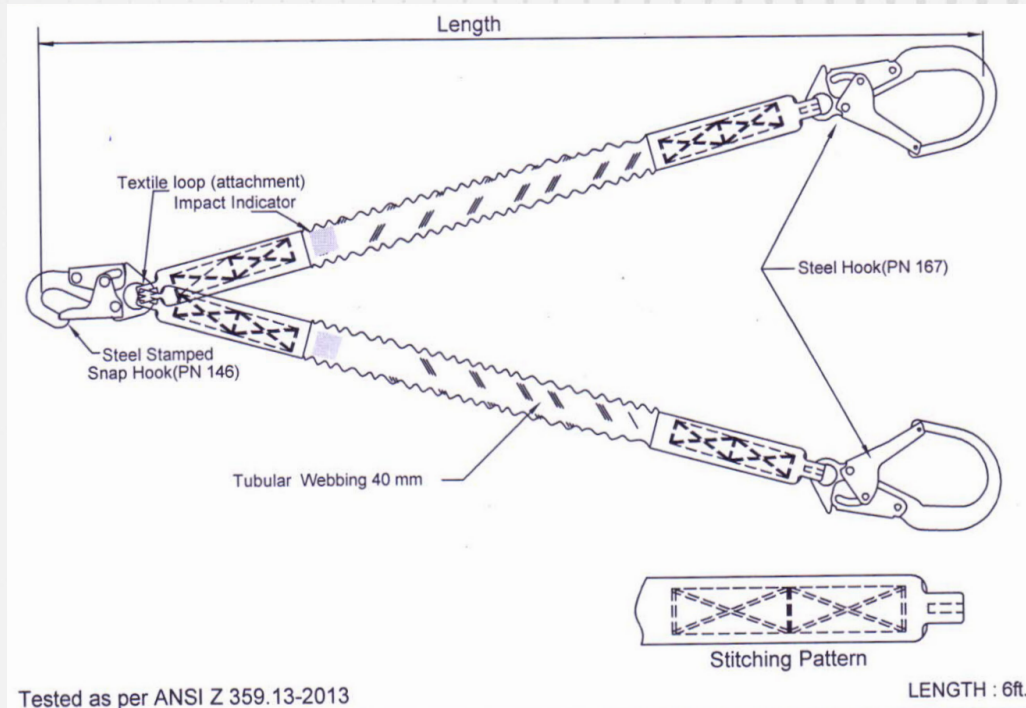

### SPECIFICATIONS

<b>Design</b>	<ul style="list-style-type: none"> <li>▶ 6-foot flame-resistant internal shock-absorbing lanyard</li> <li>▶ Dual legs equipped with a steel snap hook (PN 146) at the single end and steel rebar hooks at the double end (PN 167)</li> <li>▶ Ideal for welders</li> </ul>
<b>Webbing</b>	<ul style="list-style-type: none"> <li>▶ Material: Aramid</li> <li>▶ Width: 1.57 in. ± 0.04 in. (40mm ± 1mm)</li> <li>▶ Breaking strength: 6,000 lbs. (Minimum)</li> </ul>
<b>Stitching Thread</b>	<ul style="list-style-type: none"> <li>▶ Material: Kevlar</li> </ul>
<b>Metal Components</b>	<ul style="list-style-type: none"> <li>▶ Material: alloy steel</li> <li>▶ Plating: zinc plated</li> <li>▶ Finish: shot-blasted</li> <li>▶ Breaking strength: 5,000 lbs.</li> </ul>
<b>Weight</b>	<ul style="list-style-type: none"> <li>▶ 6.02 lbs. ± 0.02 lbs.</li> </ul>
<b>Applicable Standards</b>	<ul style="list-style-type: none"> <li>▶ Meets or exceeds ANSI Z359.13-2013</li> </ul>

**Safe Keeper Fall Protection** is committed to providing high-quality fall protection equipment and systems to create a safer work environment and ultimately save lives in the workforce. We use today's cutting-edge manufacturing processes and experts, applying real-world practical knowledge to engineer effective yet affordable solution-focused products.

