


# 4.5'-6' DUAL-LEG INTERNAL SHOCK-ABSORBING ELASTIC LANYARD WITH REBAR HOOKS



## Part Number: FAP30399(6)/6-SK

Our **Dingo Core™** series of single and dual-leg lanyards provide an economical solution for Non-SRL applications and are available in multiple hook and shock pack configurations.

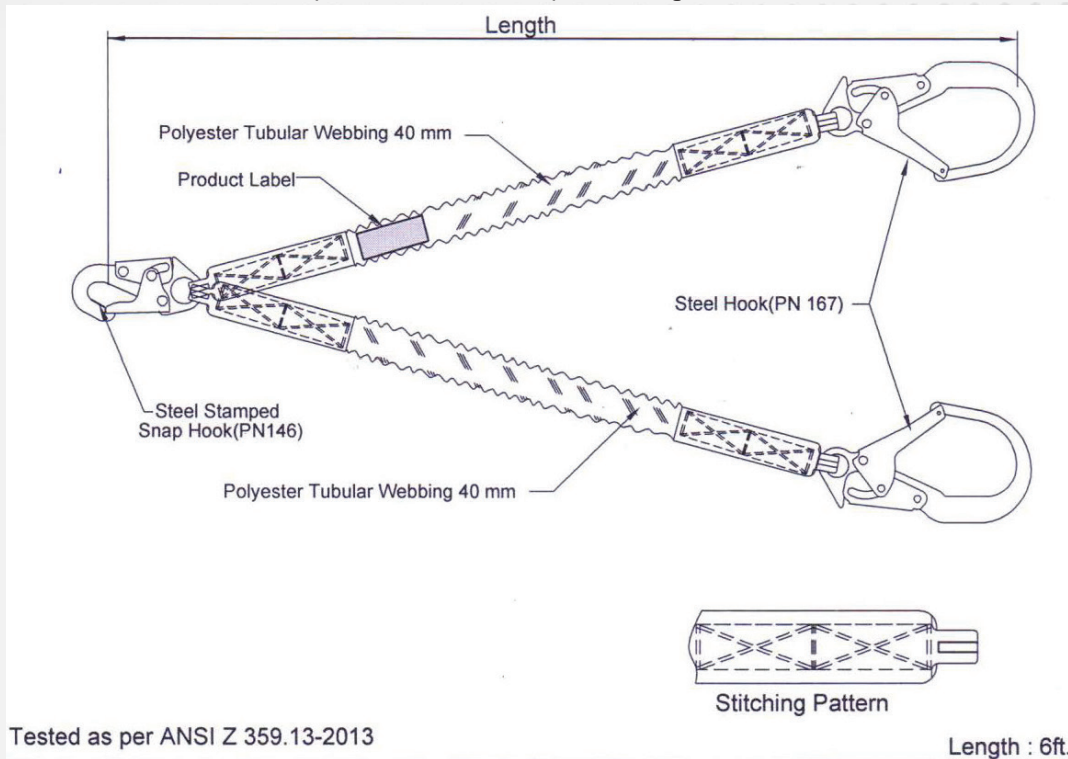

### SPECIFICATIONS

<b>Design</b>	<ul style="list-style-type: none"><li>▶ 4.5-6-foot internal shock-absorbing elastic lanyard</li><li>▶ Dual legs equipped with a steel snap hook (PN 146) at the single end and steel rebar hooks at the double end (PN 167)</li></ul>
<b>Webbing</b>	<ul style="list-style-type: none"><li>▶ Material: polyester</li><li>▶ Width: 1.57 in. <math>\pm</math> 0.04 in. (30mm <math>\pm</math> 1 mm)</li><li>▶ Breaking strength: 6,000 lbs. (Minimum)</li></ul>
<b>Stitching Thread</b>	<ul style="list-style-type: none"><li>▶ Material: high-tenacity polyester</li></ul>
<b>Metal Components</b>	<ul style="list-style-type: none"><li>▶ Material: alloy steel</li><li>▶ Plating: zinc plated</li><li>▶ Finish: shot-blasted</li><li>▶ Breaking strength: 5,000 lbs.</li></ul>
<b>Weight</b>	<ul style="list-style-type: none"><li>▶ 6.06 lbs. <math>\pm</math> 0.02 lbs.</li></ul>
<b>Applicable Standards</b>	<ul style="list-style-type: none"><li>▶ Meets or exceeds ANSI Z359.13-2013</li></ul>

**Safe Keeper Fall Protection** is committed to providing high-quality fall protection equipment and systems to create a safer work environment and ultimately save lives in the workforce. We use today's cutting-edge manufacturing processes and experts, applying real-world practical knowledge to engineer effective yet affordable solution-focused products.

