


# ATTACHABLE PADDED POSITIONING BELT



Part Number: W2101G-SK

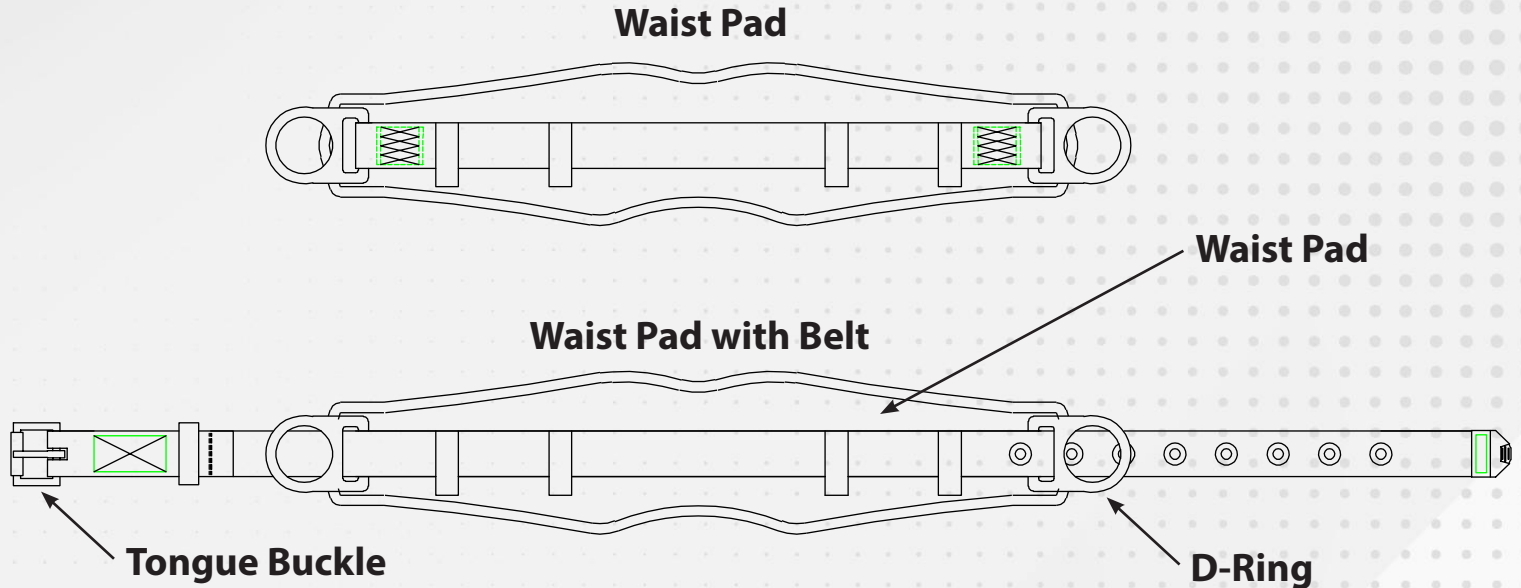

## SPECIFICATIONS

<b>Design</b>	<ul style="list-style-type: none"><li>▶ Equipped with two side D-rings for work positioning</li><li>▶ Adjustable grommeted tongue buckle for easy adjustment</li><li>▶ Equipped with mesh and foam padding for extra support and comfort</li><li>▶ Minimum and Maximum Weight: 130-310 lbs. (Including all tools)</li><li>▶ To be used in combination with a safety harness</li><li>▶ 52" length</li></ul>
<b>Forged D-Rings</b>	<ul style="list-style-type: none"><li>▶ Material: steel</li><li>▶ Minimum Breaking Strength: 5,000 lbs. / 23 kN</li></ul>
<b>Tongue Buckle</b>	<ul style="list-style-type: none"><li>▶ Material: steel</li><li>▶ Minimum Breaking Strength: 4,000 lbs. / 18 kN</li></ul>
<b>Webbing</b>	<ul style="list-style-type: none"><li>▶ Material: 100% polyester</li><li>▶ Width: 1.73 in. <math>\pm</math> 0.04 in. (44mm <math>\pm</math> 1mm)</li><li>▶ Minimum Breaking Strength: 7,500 lbs. / 33 kN</li></ul>
<b>Waist Pad</b>	<ul style="list-style-type: none"><li>▶ Thickness: .75 in. <math>\pm</math> 0.04 in. (19mm <math>\pm</math> 1mm)</li></ul>
<b>Applicable Standards</b>	<ul style="list-style-type: none"><li>▶ Meets or exceeds ANSI Z359.11-2014</li></ul>

Safe Keeper Fall Protection is committed to providing high-quality fall protection equipment and systems to create a safer work environment and ultimately save lives in the workforce. We use today's cutting-edge manufacturing processes and experts, applying real-world practical knowledge to engineer effective yet affordable solution-focused products.

